


# MINI SERIES

TO DEAL WITH THE LITTLE PROJECTS

It reflects the requirements of a small, light machine with the simplest possible construction. These machines are suitable for small-scale jobs where a low level of compaction is acceptable.



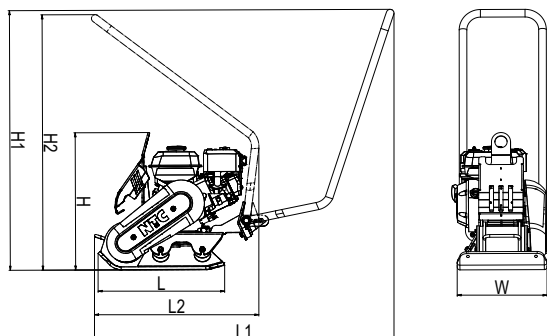

TYP	Machine dimensions (mm)						
VD 12P	H	H1	H2	L	L1	L2	W
	500	1005	920	460	1030	640	330

## TECHNICAL PARAMETERS

### OPERATIONAL PARAMETERS

Operational weight	[kg]	60
Plate dimensions (W x L)	[mm]	330 x 460
Centrifugal force	[kN]	12
Frequency	[Hz]	100
Maximal speed	[m/min]	25

### ENGINE

Maker and type	Honda	GX 120
Fuel	[-]	Petrol
Net power ( 3600 r./min )	[kW]	2,6
Emission class	[-]	EU Stage V

### OPERATIONAL FLUIDS

Fuel tank capacity (petrol)	[l]	2
Engine oil capacity (10W30)	[l]	0,6
Exciter oil capacity (10W30)	[l]	0,07

### HYGIENE PARAMETERS

Noise level $L_{pA,d}$	[dB]	88+2
Noise level $L_{WA,G}$	[dB]	101
Vibration $a_{hvd}$	[m/s <sup>2</sup> ]	11,3+4,5

## FEATURES

- Simple design
- Folding handle
- Central lifting eye
- Two-staged vibration reduction
- Handling points on all sides of the machine
- Rounded edges of the plate

## OPTIONAL ACCESSORIES

- Sprinkling kit (capacity of the tank 5 l) ☐
- Soft pad for pavement compaction ☐
- Wheel kit for easy handling ☐
- Hour counter ☐
- Trottle lever on the handle ☐